



Claims:

We claim:

1. A process of polymerizing olefin(s) to produce a polyolefin comprising contacting in a reactor olefins and a catalyst composition comprising a Group 15 containing compound and a bulky ligand metallocene catalyst compound at a reaction temperature of from 30°C to 120°C; wherein raising or lowering the reaction temperature narrows or broadens the Mw/Mn of the polyolefin, respectively; and wherein the Group 15 containing metal compound is represented by the formulae:

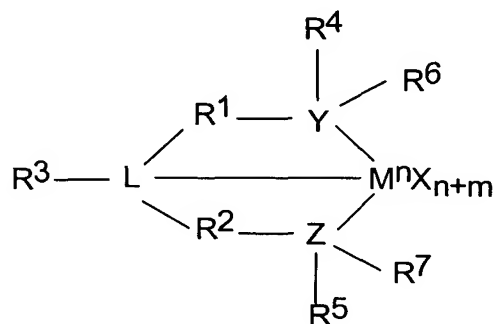

or

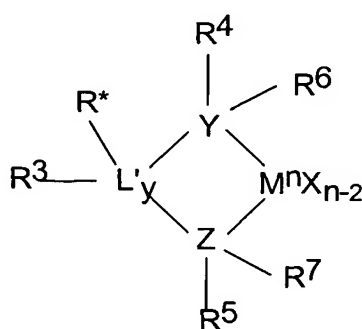

wherein M is a Group 4, 5 or 6 metal;

each X is independently a leaving group;

y is 0 or 1;

n is the oxidation state of M;

m is the formal charge of the ligand comprising the YZL or YZL' groups;

L is a Group 15 or 16 element;

L' is a Group 15 or 16 element or Group 14 containing group;

Y is a Group 15 element;

Z is a Group 15 element;

R¹ and R² are independently a C₁ to C₂₀ hydrocarbon group, a heteroatom containing group having up to twenty carbon atoms, silicon, germanium, tin, lead, or phosphorus; wherein R¹ and R² may be interconnected to each other;


R³ is absent or a hydrocarbon group, hydrogen, a halogen, a heteroatom containing group;

R⁴ and R⁵ are independently an alkyl group, an aryl group, substituted aryl group, a cyclic alkyl group, a substituted cyclic alkyl group, a cyclic arylalkyl group, a substituted cyclic arylalkyl group or multiple ring system; wherein R⁴ and R⁵ may be interconnected to each other;

R⁶ and R⁷ are independently absent, or hydrogen, an alkyl group, halogen, heteroatom or a hydrocarbyl group; and

R* is absent, or is hydrogen, a Group 14 atom containing group, a halogen, a heteroatom containing group.

2. The process of Claim 1, wherein R⁴ and R⁵ are represented by the formula

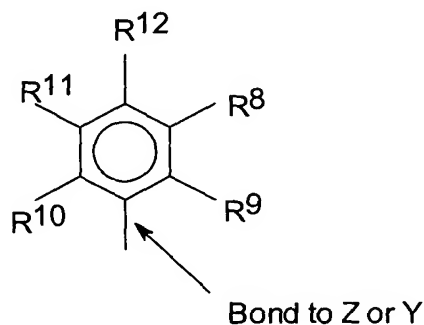

wherein R⁸ to R¹² are each independently hydrogen, a C₁ to C₄₀ alkyl group, a halide, a heteroatom, a heteroatom containing group containing up to 40 carbon atoms.

3. The process of Claim 2, wherein R^8 to R^{12} are each independently a C_1 to C_{20} linear or branched alkyl group, wherein any two R groups may form a cyclic group or a heterocyclic group, and wherein the cyclic group may be aromatic.
4. The process of Claim 1, wherein M is a Group 4 metal and each of L, L', Y and Z are nitrogen atoms.
5. The process of Claim 1, wherein the catalyst composition is supported.
6. The process of Claim 1, wherein the catalyst composition further comprises an activator; wherein the catalyst composition is introduced into the reactor in an alkane as a solution, suspension or emulsion.
7. The process of Claim 1, wherein the process is a slurry process or a gas phase process.
8. The process of Claim 1, wherein the olefins are ethylene and at least one olefin comonomer selected from olefins having from 4 to 12 carbon atoms.
9. The process of Claim 8, wherein a polyethylene copolymer is isolated having a bimodal molecular weight distribution; and wherein the M_w/M_n value of the copolymer ranges from 20 to 40.
10. The process of Claim 9, wherein the copolymer comprises a high molecular weight component and a low molecular weight component; wherein the weight average molecular weight M_w of the high molecular weight component of the copolymer is above 150,000 a.m.u.
11. The process of Claim 10, wherein the weight average molecular weight M_w of the high molecular weight component of the copolymer is above 250,000 a.m.u.
12. The process of Claim 8, wherein a polyethylene copolymer is isolated having a density in the range of from 0.940 to 0.947 g/cm³.

13. The process of Claim 8, wherein a polyethylene copolymer is isolated having a I_{21}/I_2 value of 80 or more.
14. The process of Claim 8, wherein a polyethylene copolymer is isolated having a I_2 between 0.01 and 10dg/min.
15. The process of Claim 8, wherein a polyethylene copolymer is isolated having an extrusion rate of greater than about 17 lbs/hour/inch of die circumference.
16. The process of Claim 8, wherein the polyethylene copolymer is formed into a film or a pipe.
17. The process of Claim 8, wherein the C_x/C_2 ratio, where C_x is the amount of comonomer and C_2 is the amount of ethylene, is between about 0.001 to 0.0100.
18. The process of Claim 1, wherein the Group 15 containing catalyst compound and the bulky ligand metallocene compound are combined at molar ratios of from 10:90 to 90:10.
19. The process of Claim 1, wherein the bulky ligand metallocene catalyst compound comprises at least one fluoride or fluorine containing leaving group.
20. The process of Claim 7, wherein the process is a gas phase fluidized bed process; and wherein the C_x/C_2 , where C_x is the amount of comonomer and C_2 is the amount of ethylene, is between about 0.001 to 0.010.
21. The process of Claim 1, wherein the properties of the polyolefin are controlled by changing the amount of bulky ligand metallocene catalyst compound combined.
22. The process of Claim 1, wherein the polyolefin is produced in a single reactor.